



RFI Filter

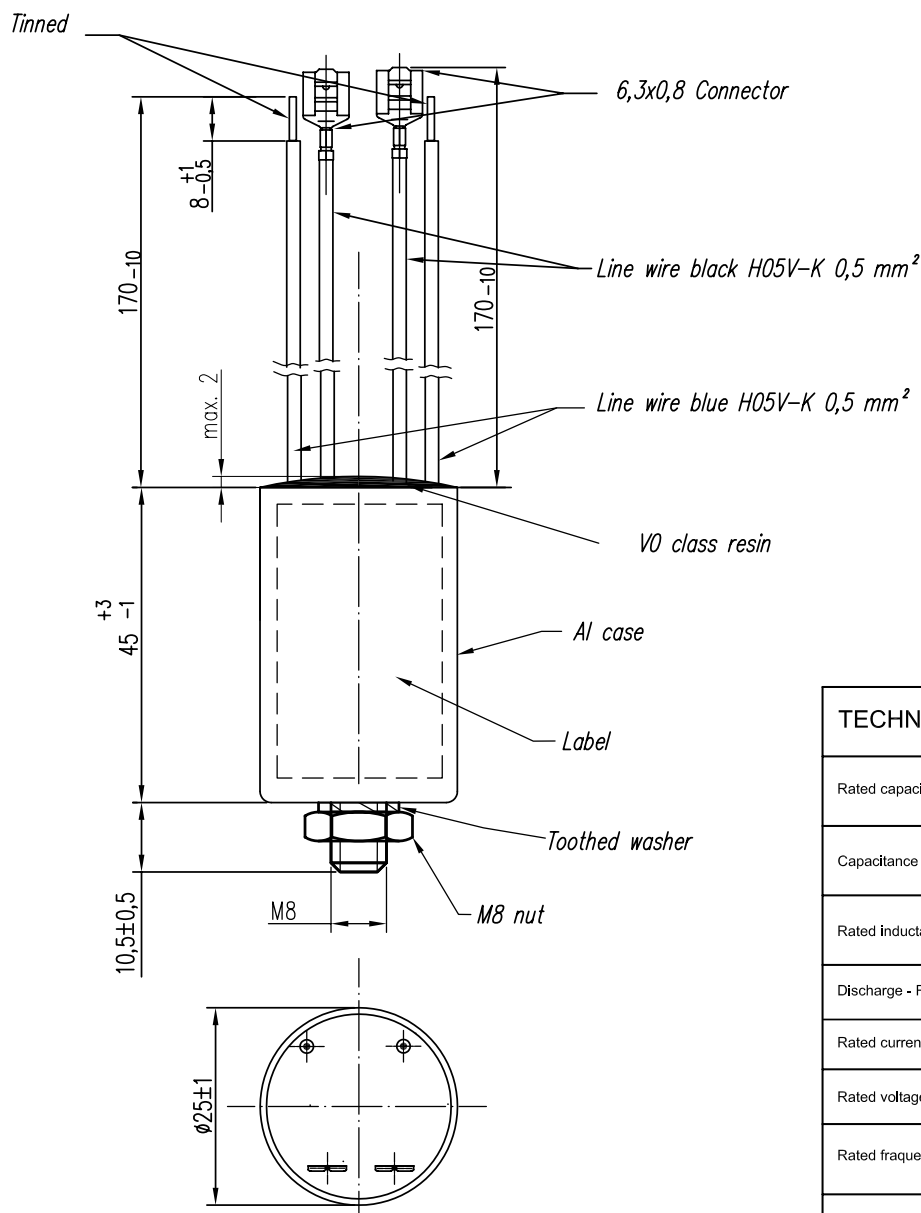

MIFLEX
FP-250/2

0,047 μ F(X2)+2x2400pF(Y2)
+2,2M Ω +2x1,0mH
110/250VAC 50/60Hz 2A
HMF 25/100/21/C

12/19

TECHNICAL DATA:

Rated capacitance:	cl. X2—0,047 μ F cl. Y2—2x2,4nF
Capacitance tolerance:	±20%
Rated inductance:	2x1,0mH +50/—30%
Discharge - Resistor:	2,2M Ω
Rated current:	2A/70°C
Rated voltage:	110/250VAC
Rated frequency:	50+60Hz
Climatic category:	25/100/21 C
100% Voltage Test in production:	kl. X2—1625Vdc—2s kl. Y2—2800Vdc—2s
Requirements:	EN 60939—2; EN 60335—1 p.30

Application:

FP-250/2 type RFI filters are designed to suppress electromagnetic interference in electrical devices with rated voltage 110 / 250V AC with a nominal frequency of 50±10Hz and the range of operating temperatures covered by the climatic category of the filter.

This product fulfils the requirements of the RoHS Directive (2011/65/EC)