



Interference Suppresion Capacitor

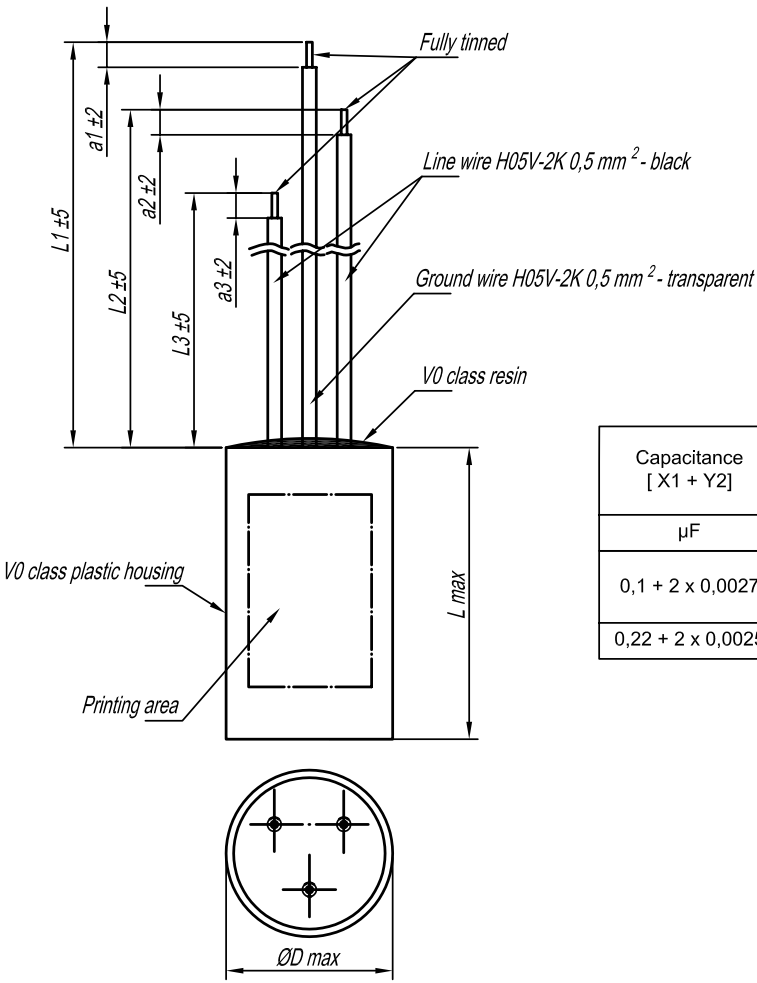

Example of printing

MIFLEX
KSPpzp-10-2 X1Y2
0,1μFM + 2x2700pFM
250VAC 40/100/21C



Capacitance [X1 + Y2]	Ver.	Dimensions							
		D	L	L1	a1	L2	a2	L3	a3
μF		mm	mm	mm	mm	mm	mm	mm	mm
0,1 + 2 x 0,0027	B	16	37	70	6	100	6	100	6
	N	16	37	160	4	100	6	100	6
0,22 + 2 x 0,0025	U	20,5	42	50	6	150	6	150	6

TECHNICAL DATA

Rated capacitance: acc. to table

Capacitance tolerance: ±20%

Rated voltage: 250Vac

Rated frequency: 50+60Hz

Climatic category: 40/100/21C

Discharge resistor: - -

100% Voltage test:

X1 - 1625Vdc - 2s
Y2 - 2800Vdc - 2s

Standards: EN 60384-14

Description:
KSPpzp type RFI capacitors are designed to suppress interferences in electronic devices with the rated voltage of 250VAC with rated frequency of 50±10Hz and the temperature range acc. to capacitor climatic category.

Uwaga:
This product fulfils the requirements of the RoHS Directive (2011/65/EC).