




Interference Suppresion Capacitor

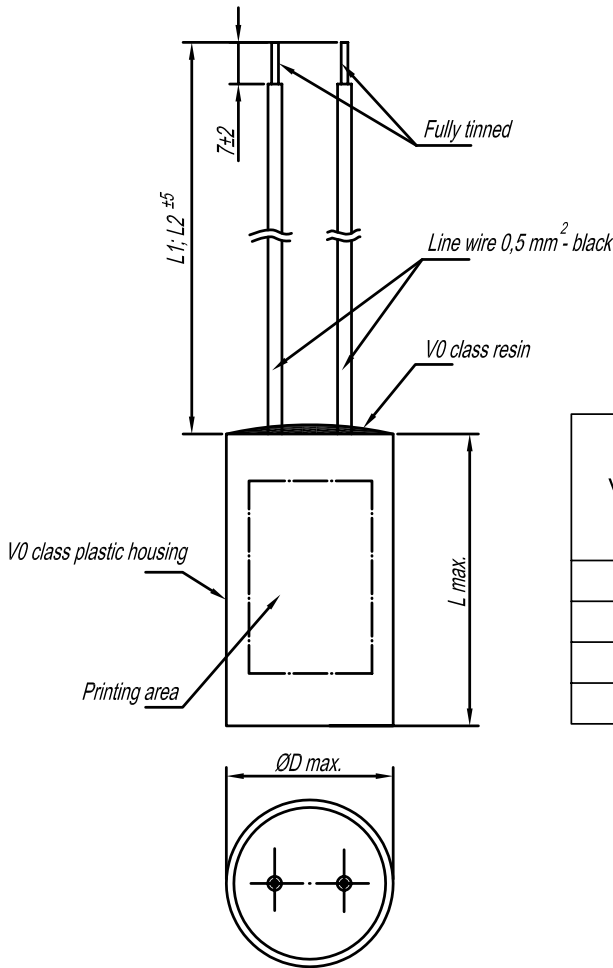

Example of printing

MIFLEX
KSPpzp-5
0,1 μ F FM (X2)
250VAC
40/085/21C
K3

EN 60384-14

Ver.	Capacitance	Dimensions			
		D	L	L1	L2
	μ F	mm	mm	mm	mm
A	0,15	16,5	42,0	80	80
B	0,07	14,5	42,0	140	160
D	0,07	14,5	42,0	80	80
K	0,1	15,5	37,0	100	100

TECHNICAL DATA

Rated capacitance: acc. to table

Capacitance tolerance: $\pm 20\%$

Rated voltage: 250Vac

Rated frequency: 50+60Hz

Climatic category: 40/085/21C

Discharge resistor: - -

100% Voltage test:
cl.X2 - 1625Vdc - 2s

Standards: EN 60384-14

Description:
KSPpzp type RFI capacitors are designed to suppress interferences in electronic devices with the rated voltage of 250VAC with rated frequency of 50 ± 10 Hz and the temperature range acc. to capacitor climatic category.

Note:
This product fulfils the requirements of the RoHS Directive (2011/65/EC).



MIFLEX Solutions Sp. z o.o.

99-300 Kutno, ul. Grunwaldzka 3, Polska

email: info@miflexsolutions.com

@Miflexsolutions All rights reserved

Index - IA05..



Made in EU
by MIFLEX SA

Updated
02.06.2025

Page
1/1