




DC Capacitor

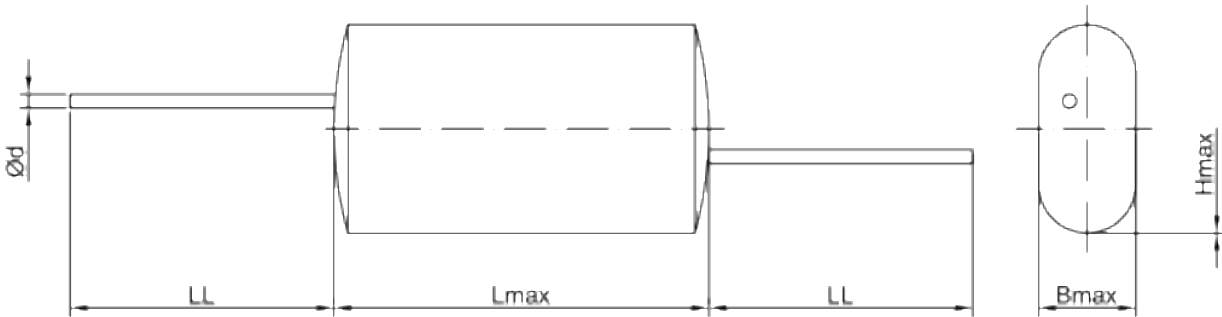

Item	Rated capacitance	Capacitance tolerance	Rated voltage	Dimensions				
				Bmax	Hmax	Lmax	LL	Ød
				mm	mm	mm	mm	mm
1	2,2	5	250	8,5	13,0	39,5	min 30	0,8
2	3,3			9,5	16,0			
3	4,7			12,0	19,0			1,0
4	6,8			13,5	23,0			
5	10,0			17,0	26,5			

TECHNICAL DATA:

- 1. Voltage test between terminals 1,6Un / 60 sec or 2Un / 2sek.
- 2. Rated capacitance @ 1V/1kHz.
- 3. Dissipation factor  $\leq 10 \times 10^{-3}$  @ 1V/1kHz.
- 4. Insulation resistance / RC - 2500s @ 100V/60sec.
- 5. Climatic category 55/100/21.
- 6. Capacitors meet the requirements of EN 60384-2.
- 7. This product fulfils the requirements of the RoHS Directive (2011/65/EC).

APPLICATION

Capacitors designed to use in DC circuits or AC circuits with voltage not exceedind the value of 0,71Un.

DESIGN

Non-inductive metallized polypropylene winding encapsulated in self-extinguishing material meeting the requirements of UL 94 V-0.

