






MIFLEX Solutions

MKSP-P-I30

THREE-PHASE POLYPROPYLENE CAPACITORS
FOR POWER FACTOR CORRECTION

Version -2(B1)

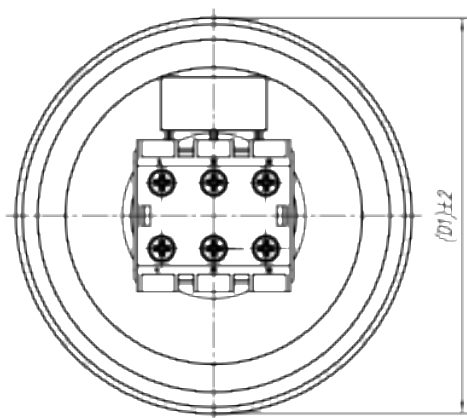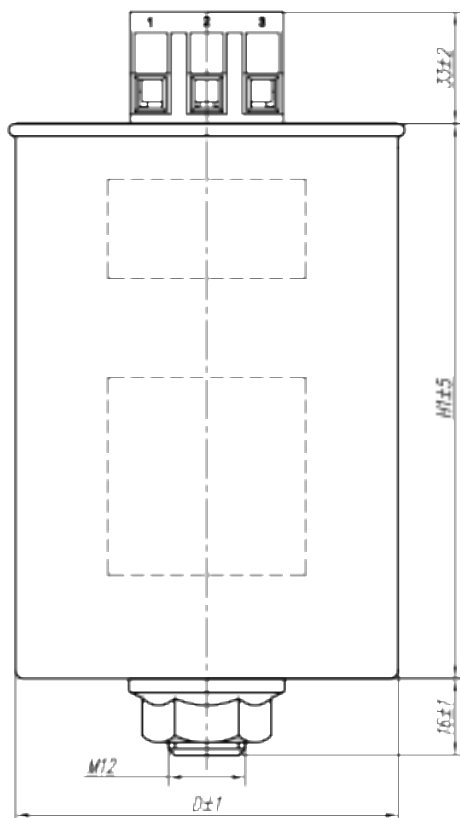

* - all rights reserved for any possible changes



MIFLEX Solutions Sp. z o.o.

99-300 Kutno, ul. Grunwaldzka 3, Polska

email: info@miflexsolutions.com

@Miflexsolutions All rights reserved



Fundusze Europejskie
Program Regionalny



Unia Europejska
Europejskie Fundusze
Strukturalne i Inwestycyjne



Made in EU
by MIFLEX SA

Updated
02.06.2025

Page 1 / 3
Edition 7

**THREE-PHASE POLYPROPYLENE CAPACITORS
FOR POWER FACTOR CORRECTION****TECHNICAL FEATURES:**

- Rated voltage: - 440V
- Frequency: - 50Hz or 60Hz
- Rated power: - Qn@ 50Hz see table page 3
- Q1+Q10 @ 50Hz see table page 3
- Q@ 60Hz multiplied by a factor 1,2 x Q @ 50Hz
- Capacitance tolerance: - -5...+ 10%,
- Life expectancy: ->100000h cat.D and >120000h cat.C
- Temperature class: - -25°C ... + 55°C (-25/D)
- during 24h ≤45°C
- during 1year ≤35°C
- -40°C ... +70°C
- Storage temperature: - metallized polypropylene film,
- Dielectric: - PUR (oil),
- Filling: - continuous,
- Type of work: - delta,
- Connection: - external,
- Discharge resistor: - ≤ 3min. to 75V,
- Discharge time: -
- Losses: - dielectric: - ≤0,2 W/kvar
- total: - ≤0,5 W/kvar,
- Test voltage: -
- between terminals: - 2,15 x Un/50Hz- 10s,
- between terminals and housing : - 3,6kV / 50Hz - 10s,
- Housing: - aluminium,
- Humidity class: - C,
- Permitted overvoltages: - 1,1 x Un (8h in every 24h)
- 1,3 x In,
- Max inrush current: - 100 x In,
- Number of switches per year: - ≤ 5000 acc. z EN 60831-1
- Max du/dt: - ≤ 30V/μs
- Safety: - self-healing, overpressure disconnecter,
- dimension with overpressure device activated increases by 20mm
- natural or force
- Cooling: - vertical,
- Mounting position: - inside, altitude ≤ 2000m,
- Installation: - version 2(B1) - IP20,
- Protection degree: -
- PCB-free: -
- Standards: - EN 60831-1/2 and ICE 60831-1/2,
- This product fulfils the requirements of the RoHS Directive (2011/65/EC).
- Terminals: - 3x M5, max torque 3Nm,
- Fixing: - M12, max torque 12Nm.
- Capacitors are not intended to be connected directly to exposed installations.

* - all rights reserved for any possible changes



MIFLEX Solutions Sp. z o.o.

99-300 Kutno, ul. Grunwaldzka 3, Polska

email: info@miflexsolutions.com

@Miflexsolutions All rights reserved

Fundusze
Europejskie
Program RegionalnyUnia Europejska
Europejskie Fundusze
Strukturalne i InwestycyjneMade in EU
by MIFLEX SAUpdated
02.06.2025Page 2/ 3
Edition 7

THREE-PHASE POLYPROPYLENE CAPACITORS
FOR POWER FACTOR CORRECTION

Rated voltage	Rated power	Rated capacitance	Rated current	Dimensions		Weight	Code
Un @ 50Hz [V]	Qn @ 50Hz [kVar]	C [µF]	In @ 50Hz [A]	H1 ¹⁾ [mm]	D±1/D1±2 [mm]	m [kg]	[-]
440	5	3x27,4	6,6	170	76/80	0,9	I130X050J-B1
	7,5	3x41,1	9,8	170	96/100	1,3	I130X075J-B1
	10	3x54,8	13,1	210	96/100	1,6	I130X100J-B1
	12,5	3x68,5	16,4	245	96/100	1,8	I130X125J-B1
	15	3x82,2	19,7	245	96/100	1,8	I130X150J-B1
	20	3x109,6	26,2	210	116/121	2,3	I130X200J-B1
	25	3x137,0	32,8	245	116/121	2,7	I130X250J-B1

Version	In [A]	Minimum cable cross-section suggested for phase [mm²]
2(B1)	≤7	2,5
	≤14	4
	≤22	6
	≤29	10
	≤43	16
	≤58	25
	≤72,5	35

Un	Cn	In	Qn	D ±1	H ±5	Q1 [kvar]	Q2 [kvar]	Q3 [kvar]	Q4 [kvar]	Q5 [kvar]	Q6 [kvar]	Q7 [kvar]
[V]	[µF]	[A]	[kvar]	[mm]	[mm]	230V	400V	415V	425V	440V	480V	525V
440	3x 27,4	6,6	5,0	76	170	1,4	4,1	4,4	4,7	5,0	-	-
	3x 41,1	9,8	7,5	96	170	2,0	6,2	6,7	7,0	7,5		
	3x 54,8	13,1	10,0	96	210	2,7	8,3	8,9	9,3	10,0		
	3x 68,5	16,4	12,5	96	245	3,4	10,3	11,1	11,7	12,5		
	3x 82,2	19,7	15,0	96	245	4,1	12,4	13,3	14,0	15,0		
	3x 109,6	26,2	20,0	116	210	5,5	16,5	17,8	18,7	20,0		
	3x 137,0	32,8	25,0	116	245	6,8	20,7	22,2	23,3	25,0		

* - all rights reserved for any possible changes

1) - dimension with overpressure device activated increases by 20mm



MIFLEX Solutions Sp. z o.o.

99-300 Kutno, ul. Grunwaldzka 3, Polska

email: info@miflexsolutions.com

@Miflexsolutions All rights reserved

Fundusze
Europejskie
Program RegionalnyUnia Europejska
Europejskie Fundusze
Strukturalne i InwestycyjneMade in EU
by MIFLEX SAUpdated
02.06.2025Page 3/ 3
Edition 7