





## **RFI UNIT WITH RESISTOR**

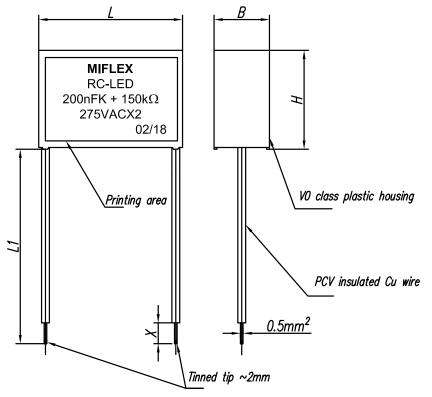

Electric schema



Example of printing

**MIFLEX**RC-LED
200nFK + 150kΩ
275VACX2
02/18

Туре	Capacitane	Resistance	Dimensions				
			B ±0,5	H ±0,5	L ±0,5	L1 ±5	X-2
	μF	kOhm	mm				
V02DU410KR412	0,1	120	8,5	17	18	80	12
V02EU420KR415	0,2	150	8,5	16,5	26,5	80	12

## Description:

The RC-LED unit is intended for LED lighting circuits to improve the conditions of their operation.

This product fulfils the requirements of the RoHS Directive (2011/65/EC).

TECHNICAL DATA				
Rated capacitance:	acc. to table			
Capacitance tolerance:	±10%			
Rated voltage:	275Vac			
Climatic category:	40/085/56C			
Discharge resistor:	acc. to table			
Resistance tolerance:	±5%			
100% Voltage test:				
	1700Vdc - 1s			
Standards:	EN 60384-14			



99-300 Kutno, ul. Grunwaldzka 3, Polska

email: info@miflexsolutions.com

@Miflexsolutions All rights reserved

Index: V02...



Updated 02.06.2025

Page 1/1