



Filtr przeciwzakłóceńowy RFI Filter



Tolerances acc to EN 22768-m

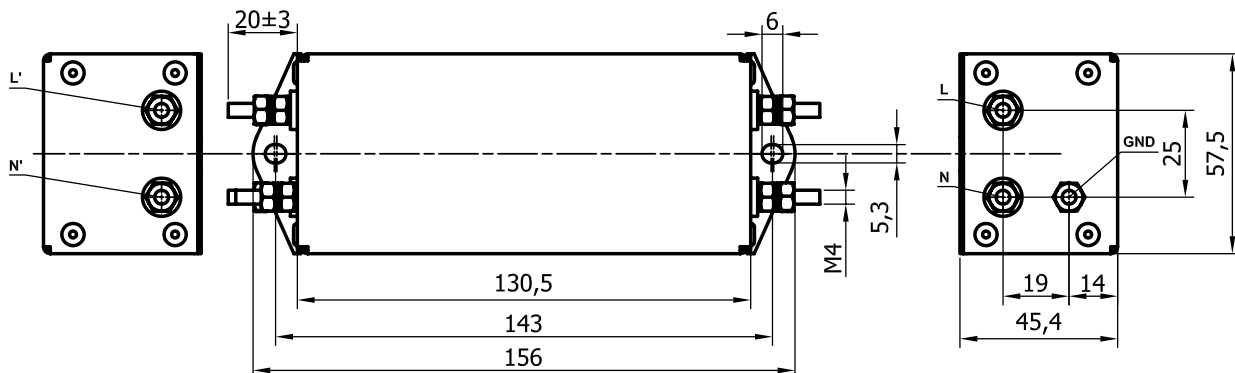

Label



Application:

X41-01 type RFI filters are designed to suppress electromagnetic interference in electrical devices with rated voltage 250V AC with a nominal frequency of 50±10Hz and the range of operating temperatures covered by the climatic category of the filter.

Note:

1. This product fulfils the requirements of the RoHS Directive (2011/65/EC)

DANE TECHNICZNE:

Technische Daten:
Technical data:

Pojemność znamionowa; Nennkapazität; Rated capacitance:	kl.X2 - 2x 2,2μF kl.Y2 - 2x 4,7nF
Tolerancja pojemności; Kapazitätstoleranz; Capacitance tolerance:	kl.X2 - ±20% kl.Y2 - ±20%
Indukcyjność znamionowa; Nenninduktivität; Rated inductance:	2x2mH -30%/+50%
Prąd znamionowy; Nennstrom; Rated current:	25A
Napięcie znamionowe; Nennspannung; Rated voltage:	110/250Vac
Częstotliwość napięcia; Nennfrequenz; Rated frequency:	50+60Hz
Kategoria klimatyczna; Klimatische Kategorie; Climatic category:	25/100/21 C
R rezystora rozładowczego; Entladewiderstand; Discharging resistor:	220kOhm
100% test napięciowy u producenta; 100% Prüfspannung beim Hersteller; 100% Voltage Test in production:	kl.X2 - 1625Vdc - 2s kl.Y2 - 2800Vdc - 2s
Wymagania; Anforderungen; Requirements:	EN 60939-2; EN60335-1 p.30